





NOME N LED IP65



NOME N LED SMD 18W-NW

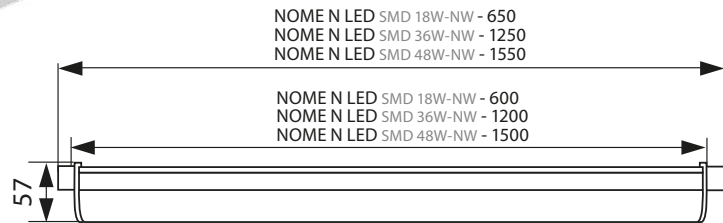

NOME N LED SMD 36W-NW



NOME N LED SMD 48W-NW

**Kanlux**



	[W]	[lm]
NOME N LED SMD 18W-NW	18	1800
NOME N LED SMD 36W-NW	36	3600
NOME N LED SMD 48W-NW	48	4800

- 220-240V~50/60Hz
- 4000
- 25000 [h]
- 2 x 1-2,5 [mm<sup>2</sup>]
- 20+40 [°C]
- 0,5 [m]
- 120 [°]
- 4000 [h]
- ≥20000
- 25000 [h]
- 2 x 1-2,5 [mm<sup>2</sup>]
- 20+40 [°C]
- 0,5 [m]
- 120 [°]
- ERAC
- CE



DE

weiß  
 Gehäuse, Glocke: Polycarbonat (PC)

Leuchte mit Durchgangsverkabelung, 2 Kabelverschraubungen PG11 in der Leuchte / Durchgangsverbindung der Leuchten möglich

EN

white  
 casing, diffuser: polycarbonate (PC)

a wired-through luminaire, 2 PG11 glands in the luminaire / through-wiring of the fixtures possible.

FR

blanc  
 boîtier, vasque : polycarbonate (PC)

luminaire câblé par un passage, 2 presses étoupes PG11 dans le luminaire / possibilité de raccordement en saillie des luminaires.