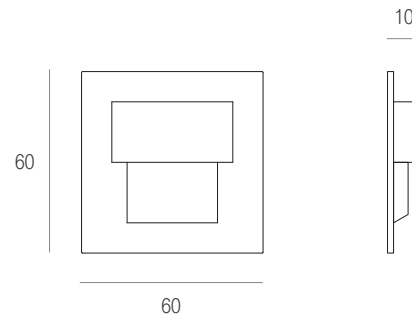


Tango Mini Stick



Specifications



| | INDEX | Color | Power | Beam | CCT | lm | lm/W | IP | IK | KG |
|------------------------------|-------|-------|-------|--------|-----|----|------|----|-------|----|
| MH-TMS-G-W-1-PL-00-01 | G | 0,4 W | W | 6000 K | 15 | 38 | 66 | 09 | 0,047 | |
| MH-TMS-G-H-1-PL-00-01 | G | 0,4 W | WW | 3000 K | 15 | 38 | 66 | 09 | 0,047 | |
| MH-TMS-G-B-1-PL-00-01 | G | 0,4 W | B | - | - | - | 66 | 09 | 0,047 | |
| MH-TMS-D-W-1-PL-00-01 | D | 0,4 W | W | 6000 K | 15 | 38 | 66 | 09 | 0,047 | |
| MH-TMS-D-H-1-PL-00-01 | D | 0,4 W | WW | 3000 K | 15 | 38 | 66 | 09 | 0,047 | |
| MH-TMS-D-B-1-PL-00-01 | D | 0,4 W | B | - | - | - | 66 | 09 | 0,047 | |
| MH-TMS-C-W-1-PL-00-01 | C | 0,4 W | W | 6000 K | 15 | 38 | 66 | 09 | 0,047 | |
| MH-TMS-C-H-1-PL-00-01 | C | 0,4 W | WW | 3000 K | 15 | 38 | 66 | 09 | 0,047 | |
| MH-TMS-C-B-1-PL-00-01 | C | 0,4 W | B | - | - | - | 66 | 09 | 0,047 | |
| ML-TMS-G-W-1-PL-00-01 | G | 0,4 W | W | 6000 K | 15 | 38 | 20 | 09 | 0,047 | |
| ML-TMS-G-H-1-PL-00-01 | G | 0,4 W | WW | 3000 K | 15 | 38 | 20 | 09 | 0,047 | |
| ML-TMS-G-B-1-PL-00-01 | G | 0,4 W | B | - | - | - | 20 | 09 | 0,047 | |
| ML-TMS-D-W-1-PL-00-01 | D | 0,4 W | W | 6000 K | 15 | 38 | 20 | 09 | 0,047 | |
| ML-TMS-D-H-1-PL-00-01 | D | 0,4 W | WW | 3000 K | 15 | 38 | 20 | 09 | 0,047 | |
| ML-TMS-D-B-1-PL-00-01 | D | 0,4 W | B | - | - | - | 20 | 09 | 0,047 | |
| ML-TMS-C-W-1-PL-00-01 | C | 0,4 W | W | 6000 K | 15 | 38 | 20 | 09 | 0,047 | |
| ML-TMS-C-H-1-PL-00-01 | C | 0,4 W | WW | 3000 K | 15 | 38 | 20 | 09 | 0,047 | |
| ML-TMS-C-B-1-PL-00-01 | C | 0,4 W | B | - | - | - | 20 | 09 | 0,047 | |

Use

For illumination of circulation routes, stairs, stair risers, cabinet fronts, or for attractive light decoration of walls.

Finishing



Colour of light



Regulatory compliance

PN-EN 60598-1:2015-04, PN-EN 60598-2:2012, PN-EN 62471:2010, PN-EN 62031:2010, PN-EN 62031:2010/A2:2015-04, PN-EN 62031:2010/A1:2013-06

Further information

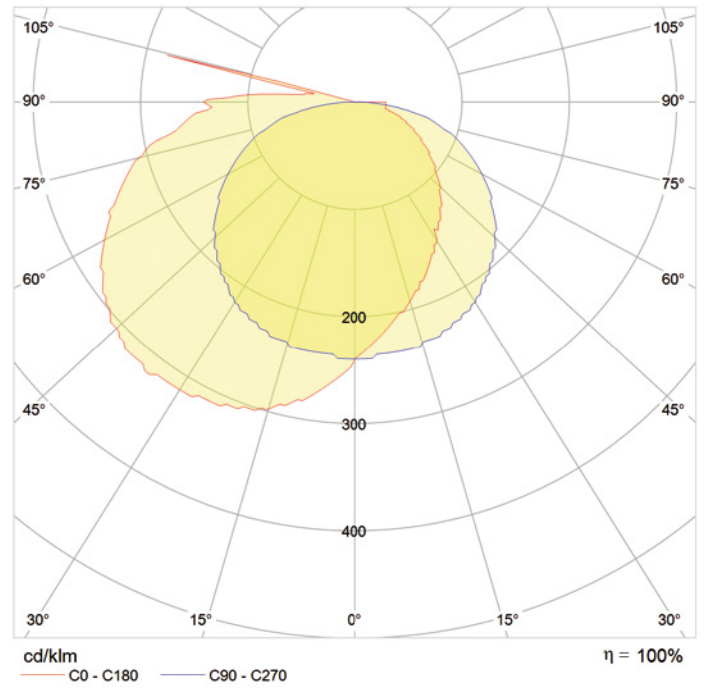
Material: aluminum

Light source: non-exchangeable LED modules
































































Method of installation: with adhesive tape or glue

Warranty: 36 months

Chart photometric



Key to symbols

| | | | | | |
|---|--|---|---|---|---|
|  | Floor wide angle lights |  | Champagne |  | Tightness |
|  | Built-in furniture wide angle lights |  | Transparent |  | Resistance |
|  | Built-in furniture narrow angle lights |  | Colour of light |  | Protection class I |
|  | Overhead furniture wide angle lights |  | Blue |  | Protection class II |
|  | Overhead furniture narrow angle lights |  | Neutral |  | Protection class III |
|  | Furniture lights mounted on glazing |  | Cool white |  | Device independent of lamps |
|  | Built-in wide angle lights |  | Warm white |  | Short-circuit and overload proof safety transformer |
|  | Overhead wide angle lights |  | Rated power |  | SELV protection |
|  | Wall-mounted wide angle lights |  | LED power |  | Min. distance from illuminated item |
|  | Hanging wide angle lights |  | Fixture power |  | Weight |
|  | Surface Finishing |  | DC voltage |  | Single LED tape module dimensions |
|  | Stainless steel (INOX) |  | AC voltage |  | Min. operating temperature |
|  | Chrome plating |  | LED light flux |  | Max. operating temperature |
|  | White |  | Luminare light flux |  | Constant current |
|  | Black |  | Luminous efficacy luminaire |  | Constant voltage |
|  | Aged brass |  | LED Light source |  | PF (Power Factor) |
|  | Aluminium |  | Replaceable Light source |  | Input voltage |
|  | Brushed nickel (INOX) |  | Energy efficiency class - LED |  | Output voltage |
|  | Brushed stainless steel (INOX) |  | Energy efficiency class - replaceable light sources |  | Compatibility with intelligent home systems |
|  | Mirror (INOX) |  | Colour rendering index |  | Dimming options |
|  | Matte brass |  | Colour temperature |  | No dimming |

Key to symbols



Compliance with RoHS



Compliance with CE Directive



SKOFF item no.



3M technology is implemented in the product